Patent Pending

Introducing the Revolutionary Harness Connector

SHNIX

International guidance for the use of mobile elevated work platforms (MEWP's) states that whilst the guard rail system is the primary fall protection, a full restraint or a fall arrest system is required with all boom supported elevated work platforms.

Best practise accepts that there are exceptional cases where MEWP's are used to gain access to or from a work area at height.

The SHNIX harness connector maintains fall prevention methods at all times during a transfer.

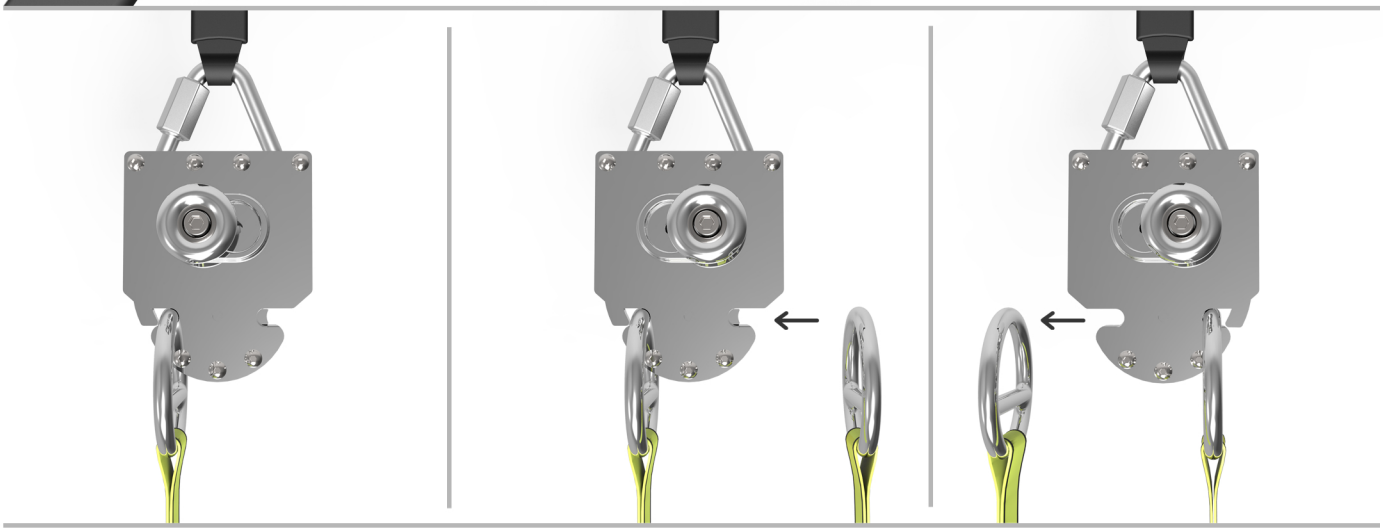

The revolutionary palm sized SHNIX device is manufactured from aircraft grade alloys and is currently undergoing testing in compliance with BS EN 362: personal protective equipment against falls from height.

The SHNIX device will only allow **ONE** lanyard to be inserted at any **ONE** time. The existing lanyard will only be ejected when another lanyard is inserted.

TDI
Transmission & Distribution Innovations

Tel: +44 (0) 1773 596 925
Mobile: +44 (0)7896 315358
Website: www.tdi-derby.com

Distributed through P&P Safety Limited
Tel: +44 (0)121 359 4561
Email: sales@ppsafety.co.uk